


22 Series

Quad 22 Control Unit (production from 1953-1969)

Features

The Quad 22 Control Unit provides full facilities for either mono or stereo operation. Both channels may also be used for mono when required by pressing the '2 MON' push buttons. The six push buttons perform 19 different functions, all clearly marked. Two provide for selection of stereo or mono, or two channel mono, and also switch the amplifier on or off as required. The other four select the programme source in either stereo or mono from radio, microphone, disc, (with 4 different equalisation characteristics) or tape. Sockets are provided for permanent connection of all radio tuners, pickups, tape recorders etc. Plug-in adaptor units enable any pickup to be matched accurately.

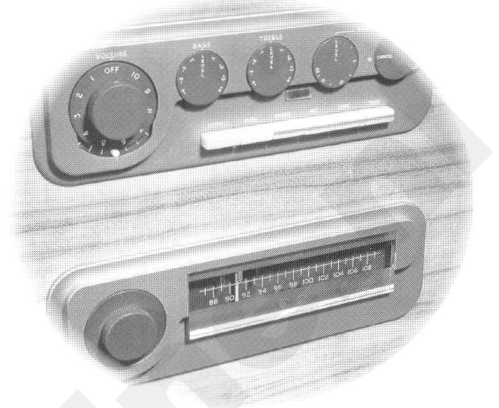

Specification

Controls:	Volume; Treble; Bass; Balance; Filters/Filter Slope; Input Selectors
Stereo Inputs:	Disc; Radio; Tape. Plus mono radio/microphone
Amplifier Output:	1.4V
Tape Output:	500mV
Dimensions:	321mm wide; 103mm high; 207mm deep
Weight:	2.8Kg
Finish:	Grey
Audio sockets:	RCA phono

Main Accessories/Spares

Description	Spares Ref.	
AC power supply plug 2-pole Bulgin	PS02P29	
Bulb 6.5V 0.15A MES round	BB6V5MB	
Plug 6-pin Jones	P06JPCT	signal & HT/LT connector
ECC83 valve	DECC83X	
EF86 valve	DEF86XX	
Volume control mod. kit.	R22VOLM	replaces original assy with separate volume and balance pots